

## DS-KAD706Y



- 2-wire IP distributor
- 6-port 2-wire cascade interfaces without device power supply
- 2 cascade interfaces for DS-KAD704Y, DS-KAD706Y & DS-KAD706Y-S series
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24 VDC input power supply


## ▪ Specification

General	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Power supply	24 VDC
Power consumption	CH1 to CH5 < 6 W, CH6 < 16 W

## ▪ Available Model

DS-KAD706Y

## ▪ Dimension

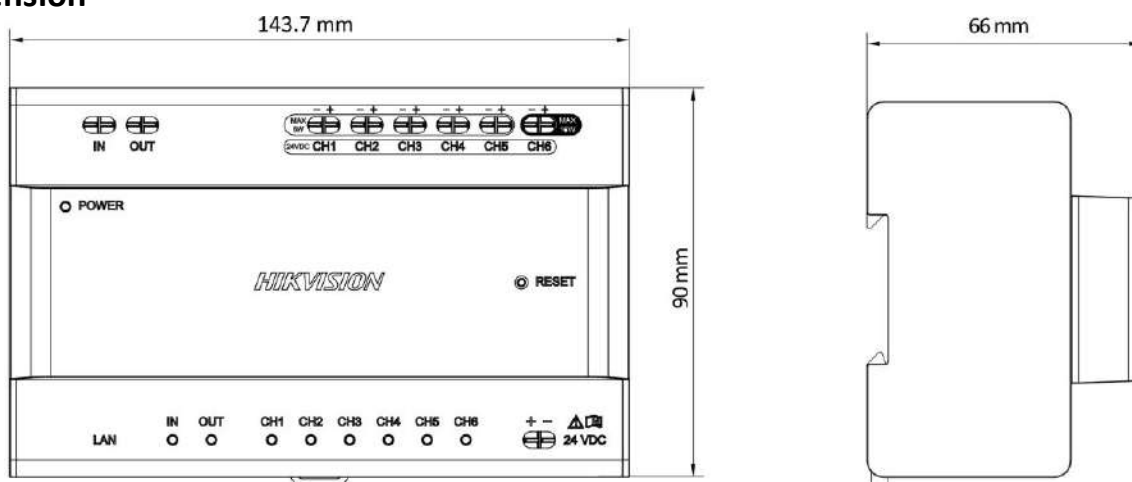

## ▪ Accessory

### ▪ Optional

DS-KAW60-2N	DS-KAD706Y	DS-KAD706Y-P	DS-KAD706Y-S	DS-KAD706Y-SP
Power Supply unit				

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

